

Elitec EL 5 - 40kWh à 320hWh



Flexible application

Lithium-ion Battery



Easy to install

Plug and play
Compact and light
1~ 2 persons installation



Excellent low temp. Performance (optional)

Operate at -10°C without any
limitatin and attenuation




Battery monitoring

Real time monitoring



elitec-lithium

We develop the future

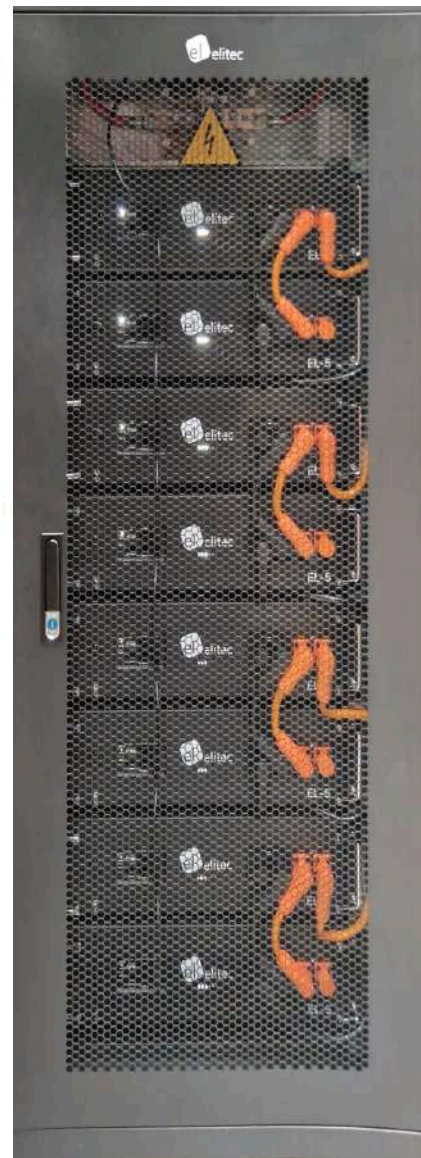

Converti



VOLTAGE	51V
CAPACITY	40 kWh
DIMENSIONS	600 x 600 x 1560 mm
WEIGHT	366 Kg
CHARGE & DISCHARGE CURRENT	400 A
COMMUNICATION PORTS	RS485 / CAN
Garantie	10 ans*
WORKING TEMPERATURE	0°C - 50°C
STORE TEMPERATURE	-20°C - 60°C
IP RATING	IP 20
COOLINGTY PE	NATURAL
HUMIDITY	5% ~ 95% NO CONDENSATION
ALTITUDE	< 3 500 M
DESIGN LIFE	15 + years 25°C
CYCLE LIFE	> 6.000 / 25°C
CERTIFICATIONS	IEC62619 / UN38.3 / CE / UKCA
COMPATIBILITY	

